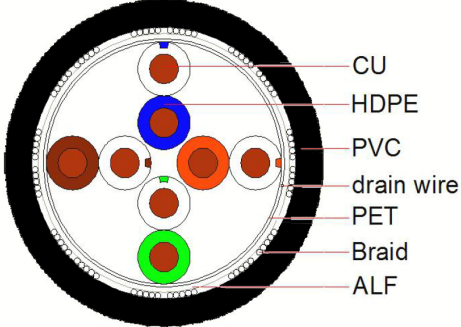


LAN CABLE

CAT. 5e SF/UTP (SFTP)

Product	CAT5E SF/UTP	
Description	SF/UTP CAT5E 4*2*24AWG CU / CCA	
Standard	EIA/TIA568B、ISO/IEC11801、YD/T1019	
Application	ISDN、10Base-T、1000Base-T4、100Base-TX	
Marking	SFTP CAT.5E 4P 24AWG EIA/TIA568B ISO/IEC11801 ***M	

Construction

Conductor	Solid Bare Copper	Insulation Colors	Blue-White/Blue	Twisting Lay Length	≤23mm
Conductor Dia.	0.51mm		Orange-White/Orange	Jacket	LSZH UV Protection
Insulation	HDPE		Green-White/Green	Jacket Dia.	6.2±0.1mm
Insulation Dia.	1.00mm		Brown-White/Brown	Jacket Color	Black
Polyester	Yes	Shield	ALU. FOIL+BRAID	Jacket Thickness	0.55±0.1mm
Drain wire	0.40mm Tin Copper	Coverage	100%	Packing	reel
Remarks	with Jelly flood, PE sheath, or other special construction, upon request				

Electrical Characteristics

Frequency(MHz)	ATT (≤dB/100m)	NEXT (≥dB)	ELFEXT (≥dB)	RL (≥dB)	PS NEXT (≥dB)
1	2.0	65.3	63.8	20.0	62.3
4	4.1	56.3	51.7	23.0	53.3
8	5.8	51.8	45.7	24.5	48.8
10	6.5	50.3	43.8	25.0	47.3
16	8.2	47.3	39.7	25.0	44.3
20	9.3	45.8	37.7	25.0	42.8
25	10.4	44.3	35.8	24.3	41.3
31.25	11.7	42.9	33.9	23.6	39.9
62.5	17.0	38.4	27.8	21.5	35.4
100	22.0	35.3	23.8	20.1	32.3
Impedance (1to100MHz)	100±15 Ohm	Conductor DC Resistance 20°C	≤94(ohms/km)	Prop. Delay	≤555ns
Capacitance 1kHz	56pF/km	Resistance Unbalance	≤3%	Delay shew	≤45ns
Capacitance unbalance	100pF/100m	Insulation Resistance	5000MΩ.KM	NVP	69%



SHG CABLE (HANGZHOU) CO., LTD

Website : www.shgcable.com



DATel S.R.L.
DATOS & TELECOMUNICACIONES